

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

High volume pressure fryers

MODEL **PFE-591** Electric



PFE-591 high volume 8-head electric pressure fryer.

General Information

Henny Penny first introduced commercial pressure frying to the foodservice industry 50 years ago. Today, Henny Penny pressure fryers continue to lead the industry in performance, durability and innovation.

Frying under pressure enables lower cooking temperatures and faster cooking times. Pressure also helps seal in the food's natural juices and reduce absorption of frying oil into product. Results of pressure frying generally produce a product with less fat and more original flavor than other methods of frying.

The Henny Penny PFE-591 is the only electric pressure fryer on the market that cooks up to 8 head of chicken or 24 lb (11 kg) of food in a single load. A high volume fryer can offer significant savings in time, labor, frying oil, energy use and maintenance over an equivalent combination of smaller competitive fryers.

Henny Penny high-volume pressure fryers incorporate several beneficial design features, including rectangular fry pot, cold-zone, counter-balanced lid lift and lock, raised edge on fryer deck and more.

The PFE-591 features high-efficiency heating elements and a heat exchange system that produces among the lowest average exhaust gas temperatures in the industry. **COMPUTRON™ 8000** control provides fully automatic, programmable operation, as well as energy-saving, filtration and load management features.

Built-in filtration system filters and returns hot oil in minutes with no extra pumps or pans and no handling of hot oil.

Standard Features

- Heavy-duty stainless steel rectangular fry pot with 7-year warranty.
- Fully insulated fry pot.
- High-efficiency heating elements.
- Patented heat transfer technology.
- Patented counter-balanced lid lift and lock system for easy loading and unloading.
- Built-in filtration.
- Raised edge on deck reduces spills.
- 4 heavy-duty casters, 2 locking.

- **COMPUTRON™ 8000** control
 - 10 programmable cook cycles
 - Melt mode
 - Idle mode
 - load compensation
 - Proportional control
 - Optional filter prompt and customizable filter tracking
 - Clean-out mode
 - 16-character digital display with multiple language settings

Accessories shipped with unit

- Loading carrier
- Basket configuration, choose one:
 - Full basket—4 flat wire baskets, 1 wire rack cover, rack handle
 - Half-size rack—4 wire racks, 1 wire rack cover, rack handle
- Stirrer and drain clean-out rod
- **Max** shortening filtration system and 2 PHT filter envelopes.

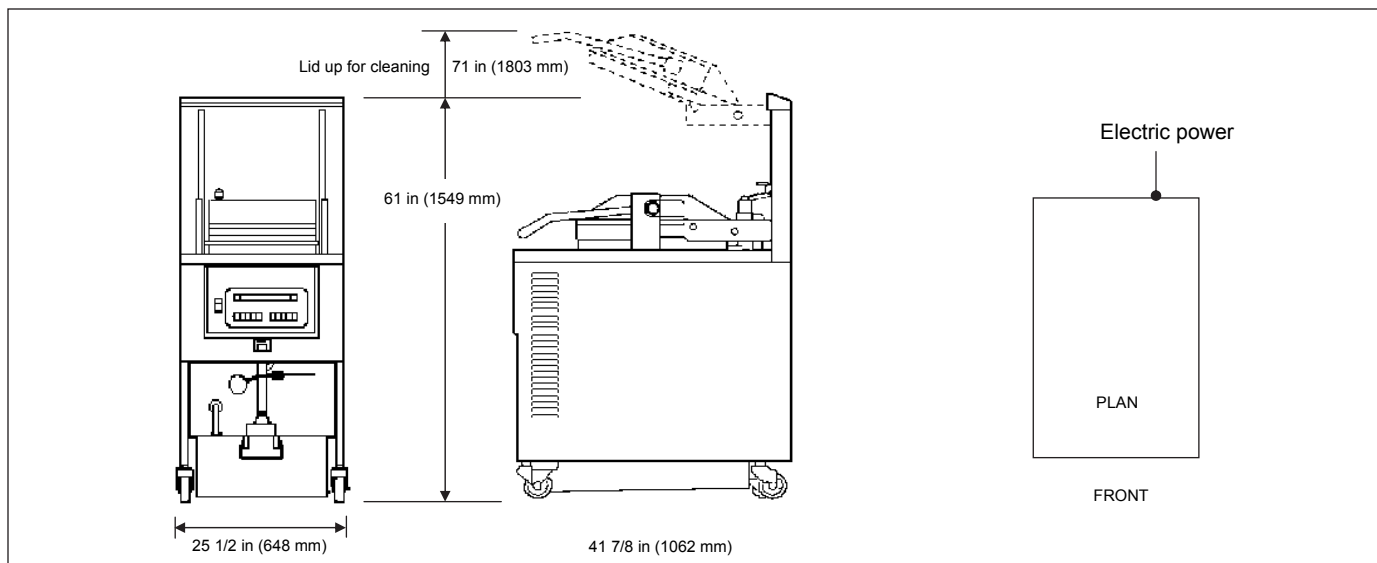
Accessories and options available separately

- Direct Connect shortening disposal
- Shortening shuttle
- Filter rinse hose
- Filter pan dolly

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE

HENNY PENNY
Engineered to Last

High volume pressure fryers

MODEL **PFE-591** Electric

Dimensions

Height: 61 in (1549 mm)
 Width: 25 1/2 in (648 mm)
 Depth: 41 in (1040 mm)

Required clearances

Top: 10 in (254 mm) lid up for cleaning
 Sides: 6 in (152 mm) air flow
 Back: 6 in (152 mm) air flow
 Front: 38 in (965 mm) filter pan removal

Crated dimensions

Length: 46 in (1168 mm)
 Depth: 30 in (762 mm)
 Height: 70 in (1778 mm)
 Volume: 56 cu ft (1.58 m³)

Net weight

N/A

Crated weight 758 lb (344 kg)

Pressure

Operating pressure: 12 psi
 Safety valve setting: 14.5 psi

Heat

4 immersed elements
 4250W each (17000W total)

Capacity

Product: 24 lb (10.9 kg) or 8 head chicken
 Oil: 48 qt or 100 lb (45 l or 45 kg)

Electrical

Volts	Phase	Cycle/Hz	Watts	Amps	Wire
200	3	50 or 60	17000	49.0	3+G
208	3	50/60	17000	47.2	3+G
240	3	50/60	17000	40.9	3+G
380	3	50	17000	25.8	3NG
400	3	50	17000	24.6	3+G
415	3	50	17000	23.7	3NG
480	3	60	17000	20.5	3+G

Laboratory certifications



Bidding Specifications

- Provide Henny Penny Model PFE-591 high-volume electric pressure fryer, 24 lbs. (10.9 kg) 8-head chicken capacity per load, with **COMPUTRON™ 8000** control and built-in filtration system.
- Fry pot is heavy duty stainless steel.
- Unit shall incorporate high-efficiency heat-exchange design for extremely fast recovery.
- Counter-balanced lid lift system enables easy loading and unloading. Lid remains in locked position until pressure reaches 1 psi.
- Electric elements encircle pot part-way up the side, and are not located below pot. This design produces a "cold zone" that extends suitable oil life.
- Unit's controller provides for programmable or manual operation with press-key controls and LED digital display. Control offers idle and melt modes, load compensation, filtration tracking and 7-day history.
- Unit shall be equipped with 4 heavy-duty casters, 2 locking.
- Unit ships with stainless steel **Max** filtration screen and 2 PHT filter envelopes, loading rack, basket handles and choice of fry baskets or wire racks.

Continuing product improvement may subject specifications to change without notice.

Henny Penny Corporation
 PO Box 60 Eaton OH 45320 USA
 +1 937 456.8400 800 417.8417
 +1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com

HENNY PENNY